


COFFEE SCALE & TIMER

3 KILOGRAMS/6.5 POUNDS/3 LITERS by grams, ounces and milliliters
Counts 100 minutes by minutes & seconds

FOR COFFEE, TEA, SPICES & OTHER SMALL QUANTITIES

- Precise to 0.1 g/0.005 oz/0.1 ml
- Tare function
- Selectable units
- Backlit digits
- Button feedback beep
- Stability indication
- Overload indication
- Timer counts up
- Stop & restart
- Low battery indication
- Battery charging indication
- On/off button
- Auto-off after 1 minute
- ABS plastic housing
- Polycarbonate polymer platform (heat resistant up to 275°F/135°C)
- **Platform Size:**
5.1 W x 4.7 L (in)/13 W x 12 L (cm)
- **Resolution:** 0.1 g, 0.005 oz, 0.1 ml
- **Product Dimensions:**
5.1 W x 0.87 H x 5.9 D (inches)/
13.0 W x 2.22 H x 15.0 D (cm)
- Built-in rechargeable lithium-ion battery and USB charging cable included

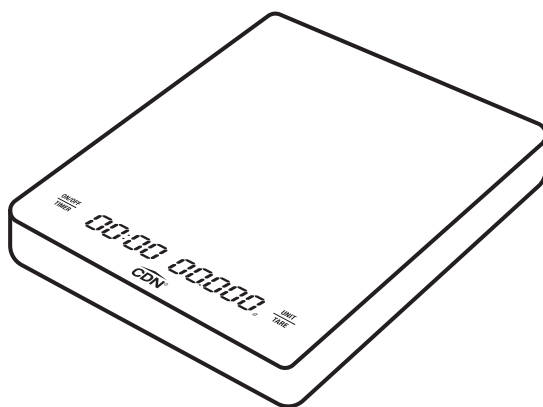

Note: Clean the scale before each use.

Important: DO NOT IMMERSE IN LIQUID.

Note: In the following instructions, names of the control buttons are shown in CAPS. Function information that appears on the display is shown in **BOLD CAPS**.

CHARGING THE BATTERY

0:00 Lo appears on the display when battery status is low and needs to be charged. The battery is built-in and does not need to be replaced.

0:00 Lo

1. Insert the USB-C plug into the jack on the top side of the scale. Insert the USB-A plug into a USB-A power source.

Note: Use only an original CDN charging cable (AD-SDC0602). The use of another cable is subject to approval by CDN.

2. — flashes on the display while charging. Allow the scale to charge for 2-5 hours.

3. **FULL** appears on the display when the battery is fully charged. The scale will then operate continuously for approximately 10 hours.

FULL

4. Unplug the cable and turn the scale on as described in *Section A: On/Off*.

OPERATING INSTRUCTIONS

Place the scale gently on a hard and flat surface and make sure it is steady before use to obtain accurate measurements. This scale notifies users with an audible alert (“beep”) when any button is touched.

A. On/Off

1. Touch and hold the ON/OFF button for 2 seconds to turn on. The display will show all segments and a “beep” will sound. The display then returns to zero.
2. Touch and hold the ON/OFF button for 2 seconds to turn off.

B. Auto Off

The scale automatically turns off after 1 minute of inactivity.

C. Unit Selection

1. Touch and hold the UNIT button for 2 seconds to select the desired unit. The display cycles through **g**, **oz** and **ml**.

D. Weighing Mode

1. Touch and hold the ON/OFF button for 2 seconds to turn on. The display will show all segments and a “beep” will sound. The display then returns to zero.
2. Place an item on the scale platform. The weight of the item appears on the display within 1 second after the item is stable.

Note: The minimum measurable weight is 1 g/0.05 oz/1 ml.

E. Tare

The tare function resets the scale display to zero in order to measure only the weight of an item. It is frequently used to subtract the weight of containers.

1. When the scale is on, place a container on the platform.
2. Touch the TARE button to reset the display to zero.
3. Place the item into the container or directly on the scale platform. The weight of only the last item added will appear on the display.
4. Continue to repeat steps 2. and 3. to measure the respective weights of additional items.
5. To clear the tare, remove all items from the platform and touch the TARE button. The display is reset to zero.

F. Timer


1. Touch the TIMER button to begin the count up.
Note: The timer counts up to a maximum of 99 minutes and 59 seconds and then turns off automatically.
2. Touch the TIMER button to interrupt the count.
3. Touch the TIMER button again to resume the count.
4. To clear the display, touch the TIMER button twice to reset the display to **0:00**.

G. Battery Status

0:00 Lo indicates when power is lower than 3.0V. Charge the battery.



H. Error Messages

1. **0:00 EEEEE** indicates an overload when the item being measured exceeds the capacity of the scale. Immediately remove the overweight item to avoid causing permanent damage to your scale.

2. **88:88 UnSt** indicates that the scale is unstable. Place the scale gently on a hard and flat surface and make sure it is steady before turning on without any items on it.



Note: Clean the scale platform before each use.

CE Note: This device could be sensitive to electrostatic discharge. If electrostatic discharge or malfunctioning occurs, please re-install the battery to reset this unit.

USAGE GUIDELINES

- Scales are precision instruments and must be handled with extreme care.
- Battery technology works best at room temperature. **Do not leave the scale in cold rooms, refrigerators or freezers for extended periods of time.**
- Place the scale gently on a hard and flat surface and make sure it is steady before use.
- The minimum capacity of the scale is 1 g/0.05 oz/1 ml.
- The maximum capacity of the scale is 3 kg/6.5 lb/3 L, which is the capacity before using the tare function.
- Do not place overweight items on the scale.
- Do not place hot items directly on the scale platform in excess of 275°F/135°C. They can distort the platform. Rather, tare a sheet pan at room temperature and then place the hot item on it.
- Store the scale in a position that keeps it free from any load bearing weight. Storing the scale with pressure on the load cells can distort the weight measurements over time.
- Hold the scale from the bottom when moving.

CARE OF YOUR PRODUCT

- Do not submerge any part of the scale in water.
- Wipe clean with a damp cloth.
- Store the scale at room temperature between 41 to 104°F/5 to 40°C.

PRECAUTIONS

- Keep the scale and/or battery away from children.
- Do not clean the scale with abrasive or corrosive compounds, which may scratch the surface and corrode the electronic circuits.
- Do not subject the scale to excessive force, shock, dust, temperature or humidity, which may result in malfunction, shorter electronic life span, damaged battery and/or distorted parts.
- Do not tamper with the scale's internal components. Doing so will invalidate the warranty and may cause unnecessary battery damage, risk of explosion and/or distorted parts.
- Do not subject the scale to excessive exposure to direct sunlight.
- **The unit is not waterproof** — do not immerse it in any liquid, which will result in faulty measurements.
- To avoid deformation, do not place the unit in extreme temperatures.
- Always read the user manual thoroughly before operating.

SPECIFICATIONS

Measurement Range	3 kg / 6.5 lb / 3 L
Unit of Measure	g, oz, ml
Resolution	0.1 g, 0.005 oz, 0.1 ml
Minimum Weight	1 g, 0.05 oz, 1 ml
Operating Range	41°F~104°F/5°C~40°C ≤90% RH
Accuracy	Central loading 2 kg ±6g; 3 kg ±9g
Power Supply	One 3.7V 1000mAh built-in rechargeable battery; Charging cable: 19.7"/0.5 m USB-A to USB-C cable
Platform Dimensions	5.1 W x 4.7 L (in)/13 W x 12 L (cm)
Product Dimensions	5.1 W x 0.87 H x 5.9 D (inches)/ 13.0 W x 2.22 H x 15.0 D (cm)
Weight	8.1 oz / 230 g (including battery)
Accessories	USB charging cable (AD-SDC0602)

The information in this document has been reviewed and is believed to be accurate. However, neither the manufacturer nor its affiliates assume any responsibility for inaccuracies, errors or omissions that may be contained herein. In no event will the manufacturer or its affiliates be liable for direct, indirect, special, incidental or consequential damages arisen by using this product or resulting from any defect/omission in this document, even if advised of the possibility of such damages. The manufacturer and its affiliates reserve the right to make improvements or changes to this document and the products and services described at any time, without notice or obligation.



1-Year Limited Warranty: Any instrument that proves to be defective in material or workmanship (excluding batteries) within one year of original purchase will be repaired or replaced without charge upon receipt of the unit prepaid at: CDN, PO Box 10947, Portland, OR 97296-0947 USA. This warranty does not cover damage in shipment or failure caused by failure to adhere to the accompanying instructions, inadequate maintenance, normal wear and tear, tampering, accident, misuse, unauthorized modification, obvious carelessness or abuse. CDN shall not be liable for any consequential or incidental damages whatsoever.

For more detailed information on our products, please visit CDNmeasurement.com or call 800-338-5594.

